



Model M061A59

Mounting adaptor, M10 external thd to 5/16-24 internal thd, Acetal (for Series 111, 112 & 113)

Installation and Operating Manual

**For assistance with the operation of this product,
contact the PCB Piezotronics, Inc.**

**Toll-free: 716-684-0001
24-hour SensorLine: 716-684-0001
Fax: 716-684-0987
E-mail: info@pcb.com
Web: www.pcb.com**




PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

REVISIONS


REV	DESCRIPTION	DIN
NR	RELEASED TO DRAFTING	47846

68824

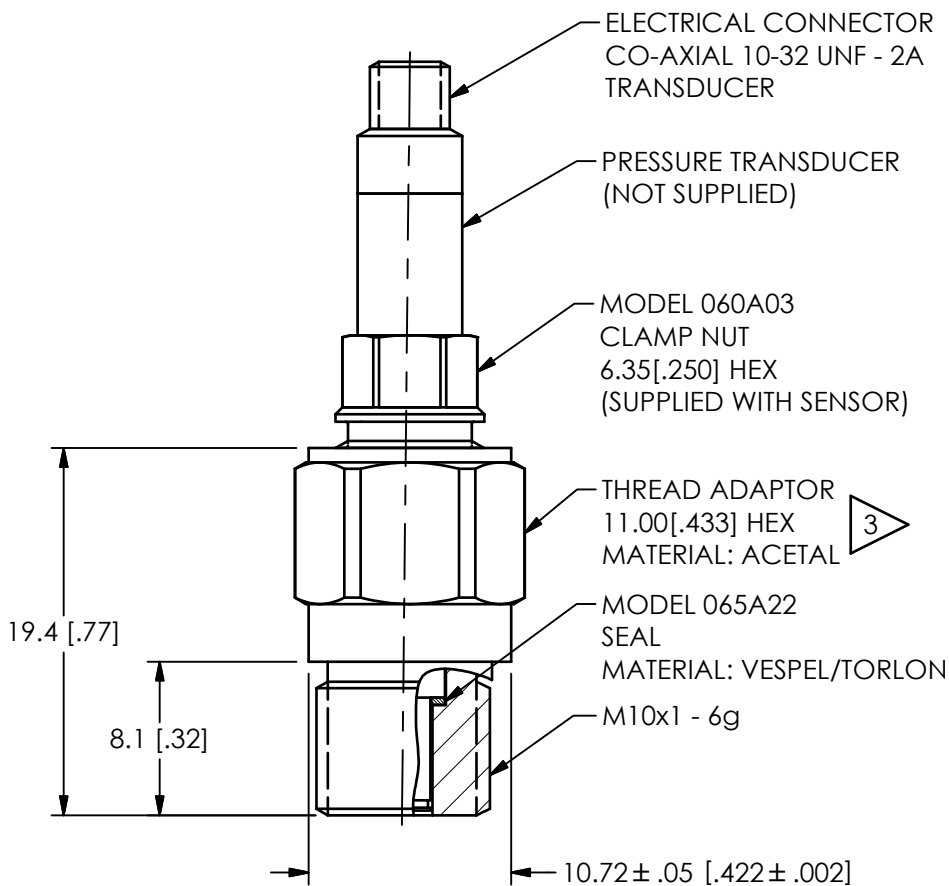

MOUNTING HOLE PREPERATION

Ø9.10[.355]THRU
M10 X 1.0-6H THRU

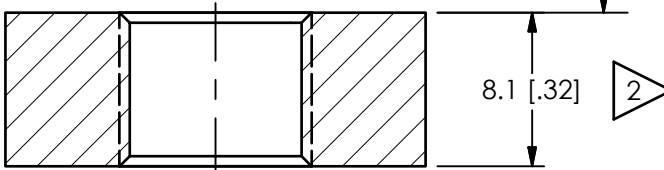

- 3 RECOMMENDED MOUNTING TORQUE ON THREAD ADAPTOR, 0.9-1.4 Nm[8-12 IN-LBS]
- 2 COUNTERBORE THICKER WALLS TO THIS DIMENSION
- 1 SEAL SURFACE MUST BE FLAT AND FREE OF TOOLS MARKS WITH A MINUMUM SURFACE FINISH OF 1.6[63]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:

DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ± 0.3 XX ± 0.13
ANGLES ± 2 DEGREES	ANGLES ± 2 DEGREES
FILLETS AND RADII .003 - .005	FILLETS AND RADII 0.07 - 0.13

DRAWN	CHECKED	ENGINEER
KRM 2/20/18	KRM 2/20/18	DRK 2/20/18

TITLE
INSTALLATION DRAWING
MODEL M061A59
THREAD ADAPTOR

PCB PIEZOTRONICS™ 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com	
CODE IDENT. NO. 52681	DWG. NO. 68824
SCALE: 2X	SHEET 1 OF 1