



Model RH044M14

FLUKE 805ES cable assembly

Installation and Operating Manual

**For assistance with the operation of this product,
contact the PCB Piezotronics, Inc.**

Toll-free: 800-959-4464

24-hour SensorLine: 716-684-0001

Fax: 716-684-3823

E-mail: imi@pcb.com


Web: www.imi-sensors.com





56426

PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

1		
REVISIONS		
REV	DESCRIPTION	DIN
A	ADDED PINOUTS AND SCHEMATIC	49846



PINOUT
SCALE 1.5X

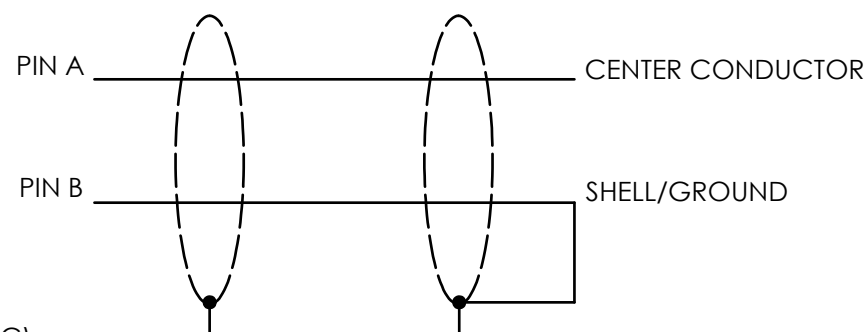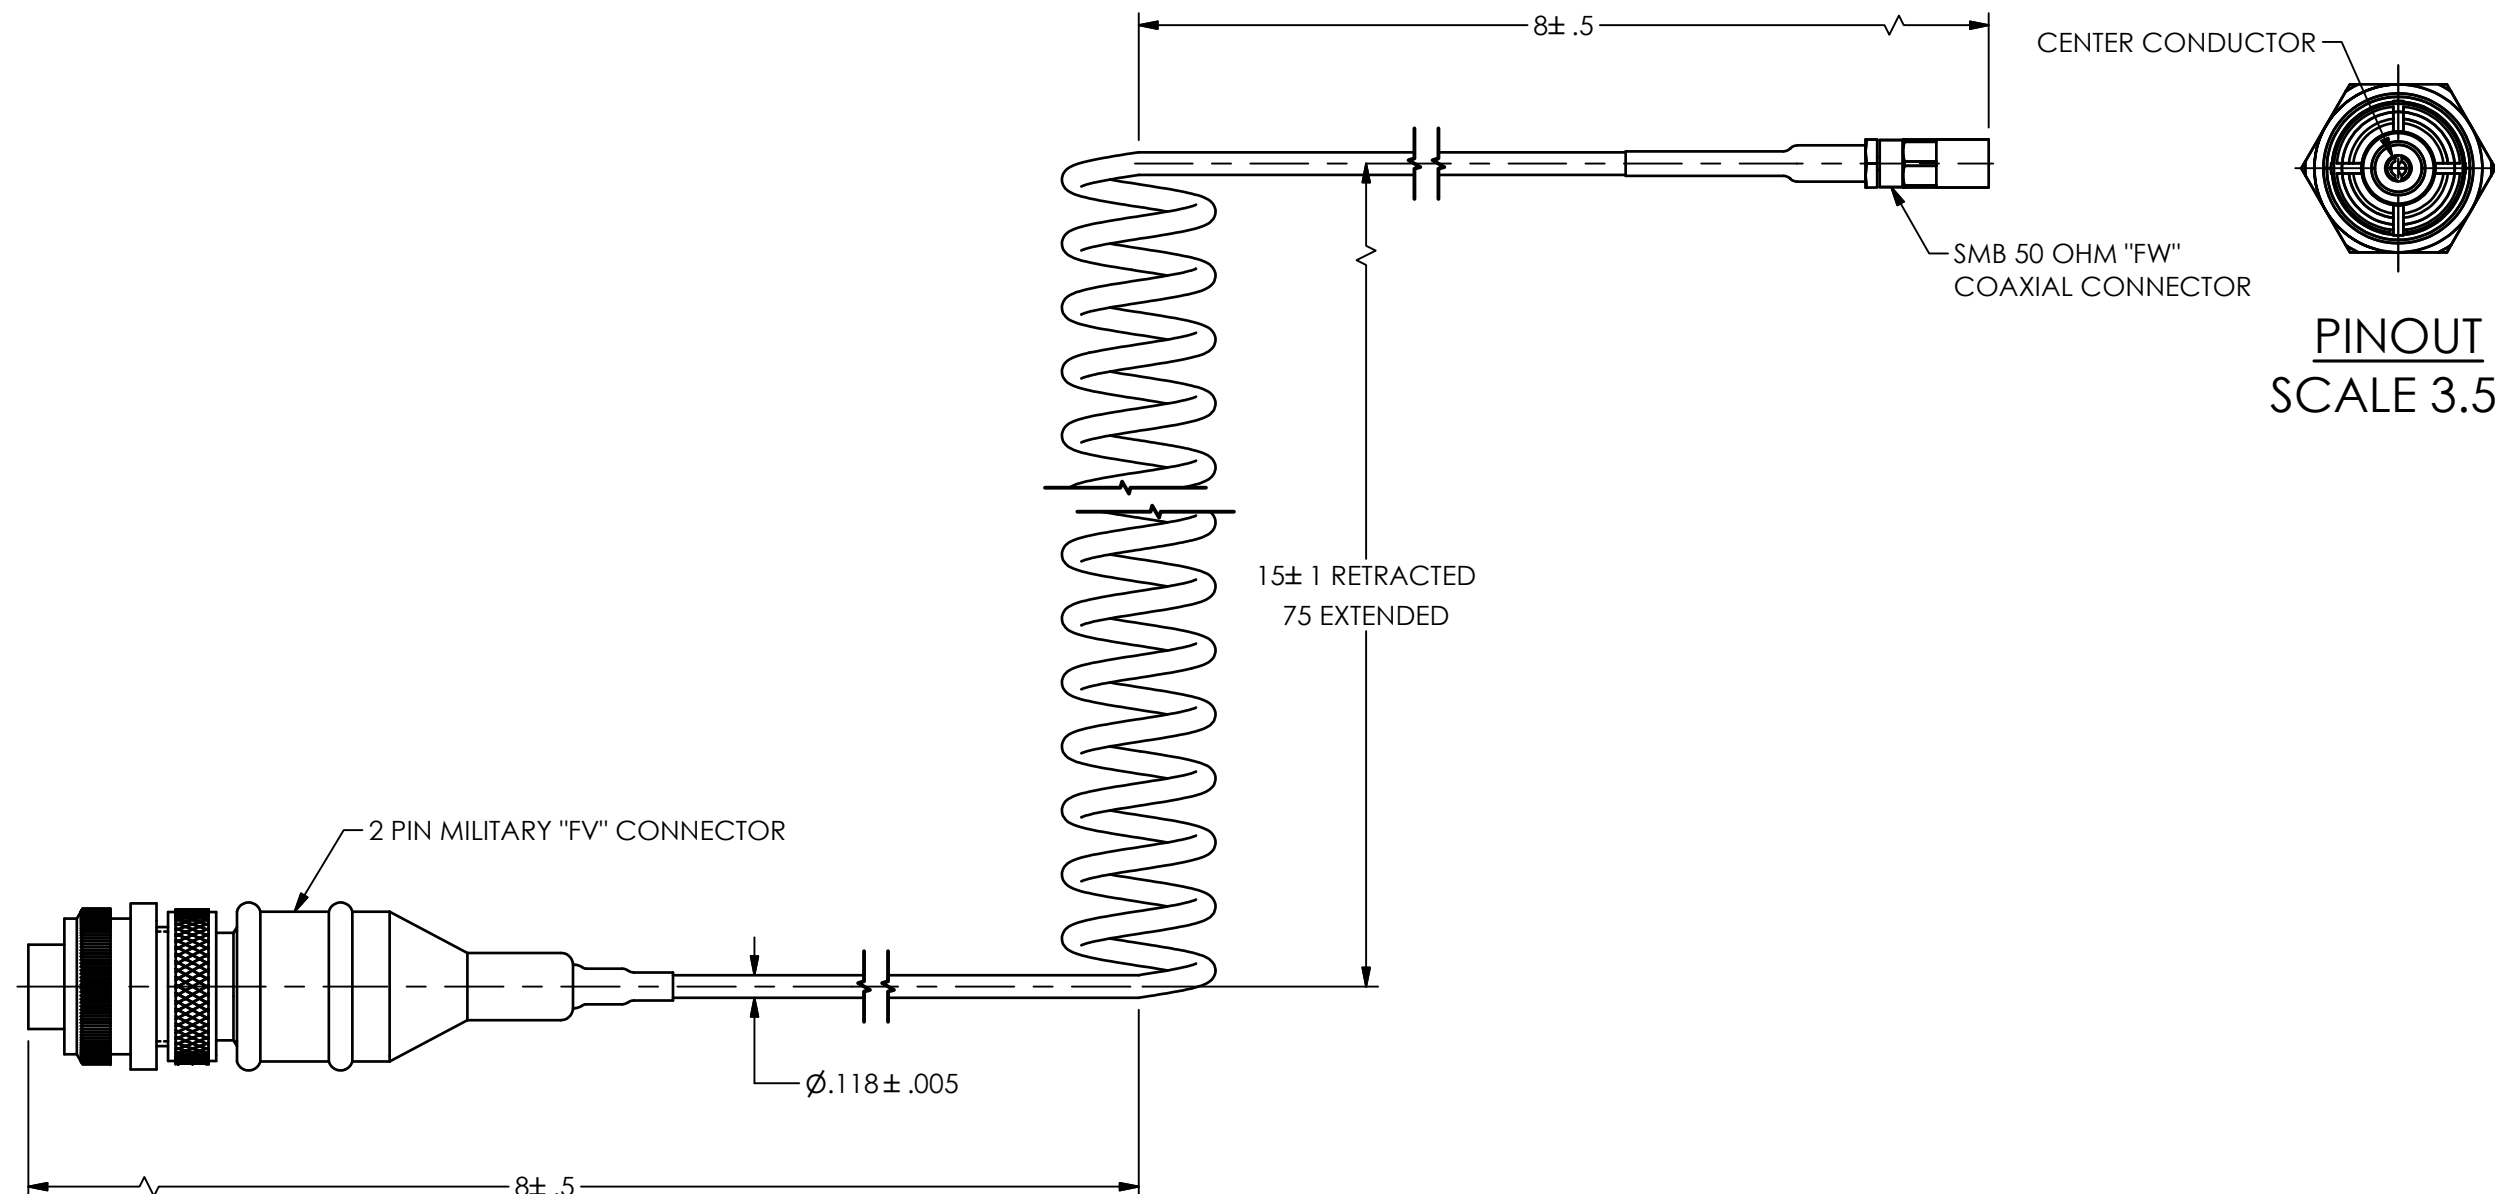

2.) RETRACTED LENGTH: 31 INCHES
EXTENDED LENGTH: 91 INCHES

1.) TEMPERATURE RANGE -40°F TO +176°F (-40°C TO +80°C)

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER		 PCB PIEZOTRONICS™ 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	JES	9/3/19	JDM	9/3/19	GCD	9/3/19	
DECIMALS XX ±.03 XXX ±.010	DECIMALS X ± 0.8 XX ± 0.25	TITLE OUTLINE DRAWING MODEL 044MXX CUSTOM CABLE						
ANGLES ± 2 DEGREES	ANGLES ± 2 DEGREES							
FILLETS AND RADII .003 - .005	FILLETS AND RADII 0.07 - 0.13							
		CODE IDENT. NO. 52681		DWG. NO. 56426		SCALE: FULL		SHEET 1 OF 1